



**STANDARDS**

- VALVE DESIGN : BS 5351 (THREE PIECE)
- FACE TO FACE : ASME B 16.10
- END CONNECTIONS : ASME B 16.5
- TESTING STANDARDS : BS 5146/ API 598

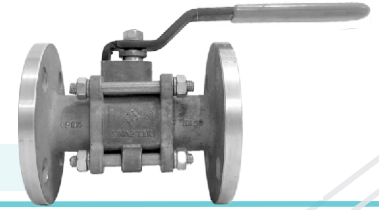

**Ball Valve Full Bore Class 150/300**

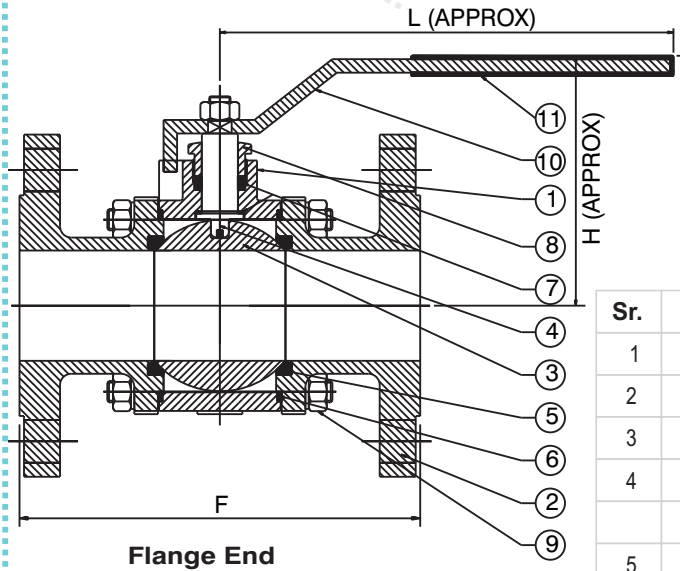

- Features :
- Rotary Actuator Can Be Mounted.
- Electro Plating For SS Ball Valves.
- Three Way " L " Port And " T " Port.
- Special Seating Arrangement For
- Low Torque.
- Fire Safe Design.
- Easy Maintenance.

Sr.	Parts Name	Material Specification
1	Body	ASTM A 216 Gr. WCB / A 351 Gr. Cf8 / A 351 Gr. CF8M
2	Adopter	ASTM A 216 Gr. WCB / A 351 Gr. CF8M
3	Ball	AISI -202/410/304/316
4	Stem	ASTM A 216 Gr. WCB / A 351 Gr. Cf8 / A 351 Gr. CF8M
5	Seat Ring	PTFE/ Glass Filled PTFE/ Carbon Filled PTFE
6	Body Ring	PTFE/ Grafoil/ Viton
7	Gland Ring	S.S.304/316
8	Gland Nut	ASTM-A-193 Gr.B7, ASTM-A
9	Stud, Nut & Spring Washer	-194 Gr.2H.
10	Handle	MS/ ASTM A 351 Ca15/ Cf8/ CF8M
11	Sleeve	Plastic

**150 CLASS**

SIZE	INCH	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"
	MM	15	20	25	40	50	65	80	100	150	200
F		110	120	130	167	177	190	203	229	267	292
H (aprx)		63	69	86	102	116	134	137	167	250	312
L (aprx)		137	137	162	205	205	300	300	350	800	875

**300 CLASS**

SIZE	INCH	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"
	MM	15	20	25	40	50	65	80	100	150	200
F		140	155	165	190	215	241	285	305	405	419
H (aprx)		63	69	86	102	116	134	137	167	250	312
L (aprx)		137	137	162	205	205	300	300	350	800	875

Note : Standard Material Specifications Can Be Changed According To Service Condition

**SAHAJANAND**  
VALVES PVT LTD



GATE VALVE

GLOBE VALVE

CHECK VALVE

BALL VALVE

FILTER VALVE

STRAINERS Y TYPE VALVE



CONTACT US

GO TO

